


Technical data sheet

LIFTING EYE NUTS (DERIVED FROM DIN 582:2018) WITH WHITWORTH WW THREAD

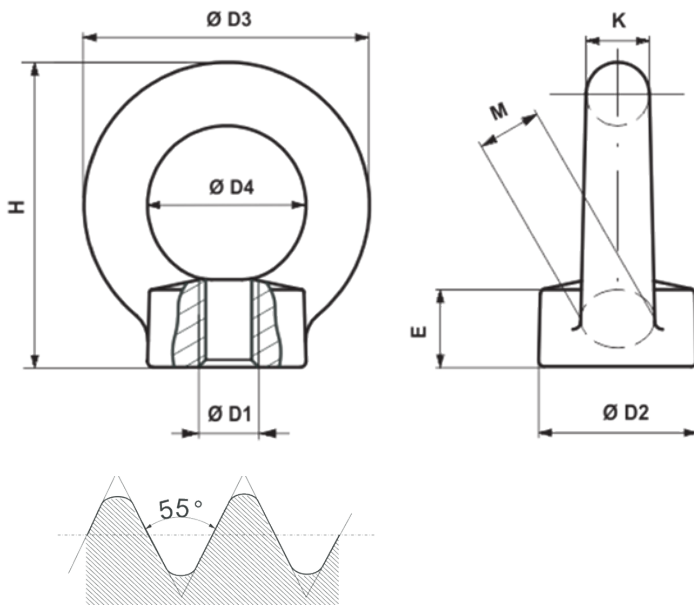

MATERIALS


- C15E + Al
- INOX - AISI304
- INOX - AISI316

FINISHES

- Electro-galvanized zinc plating
- Hot dip galvanizing

CERTIFICATES

- EN10204 3.1
- EN10204 2.2



Body	Ø D1	Threads per inch	Ø D2	Ø D3	Ø D4	E	H	K	M	Weight ~	WLL ¹	WLL ²	WLL ³	WLL ⁴
	mm	Nr	mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	kg	kg
8	1/4	20	20	36	20	8,5	36	8	10	0,05	100	70	50	50
8	5/16	18	20	36	20	8,5	36	8	10	0,05	140	100	70	70
10	3/8	16	25	45	25	10	45	10	12	0,09	230	170	115	115
10	7/16	14	25	45	25	10	45	10	12	0,09	230	170	115	115
12	7/16	14	30	54	30	11	53	12	14	0,16	230	170	115	115
12	1/2	12	30	54	30	11	53	12	14	0,16	340	240	170	170
12	9/16	12	30	54	30	11	53	12	14	0,16	340	240	170	170
16	9/16	12	35	63	35	13	62	14	16	0,24	490	350	245	245
16	5/8	11	35	63	35	13	62	14	16	0,24	700	500	350	350
16	3/4	10	35	63	35	13	62	14	16	0,24	700	500	350	350
20	3/4	10	40	72	40	16	71	16	19	0,36	1200	860	600	600
20	7/8	9	40	72	40	16	71	16	19	0,36	1200	860	600	600
24	7/8	9	50	90	50	20	90	20	24	0,72	1400	1000	700	700
24	1"	8	50	90	50	20	90	20	24	0,72	1800	1290	900	900

Technical data sheet

LIFTING EYE NUTS (DERIVED FROM DIN 582:2018) WITH WHITWORTH WW THREAD

Body	ø D1	Threads per inch	ø D2	ø D3	ø D4	E	H	K	M	Weight	WLL ¹	WLL ²	WLL ³	WLL ⁴
	mm	Nr	mm	mm	mm	mm	mm	mm	mm	kg	kg	kg	kg	kg
24	1"1/8	7	50	90	50	20	90	20	24	0,72	1800	1290	900	900
30	1"1/8	7	65	108	60	25	109	24	28	1,32	3200	2300	1600	1600
30	1"1/4	7	65	108	60	25	109	24	28	1,32	3200	2300	1600	1600
30	1"3/8	6	65	108	60	25	109	24	28	1,32	3200	2300	1600	1600
36	1"1/4	7	75	126	70	30	128	28	32	2,08	3200	2300	1600	1600
36	1"3/8	6	75	126	70	30	128	28	32	2,08	4600	3300	2300	2300
36	1"1/2	6	75	126	70	30	128	28	32	2,08	4600	3300	2300	2300
42	1"1/2	6	85	144	80	35	147	32	38	3,11	4600	3300	2300	2300
42	1"5/8	5	85	144	80	35	147	32	38	3,11	6300	4500	3150	3150
42	1"3/4	5	85	144	80	35	147	32	38	3,11	6300	4500	3150	3150
48	1"3/4	5	100	166	90	40	168	38	46	5,02	6300	4500	3150	3150
48	2"	4,5	100	166	90	40	168	38	46	5,02	8600	6100	4300	4300

Dimension variations available on request

SOME WARNINGS FOR THE CORRECT USE OF EYE BOLTS
Always read the complete instructions before use



The eyebolts must always be screwed until their support plane adheres to the surface of the piece to be lifted.
Do not use the eyebolts if they cannot be screwed in fully.



Do not use eyebolts with lateral ring pull



Do not use eyebolts with lateral ring pull